


HeliBond


High performance, injectable, cementitious, non-shrink grout

APPLICATIONS


- Used to bond HeliBars into masonry for crack stitching, lintel repair and creation, masonry beaming and CemTie installation
- For bonding metal components into masonry and concrete substrates

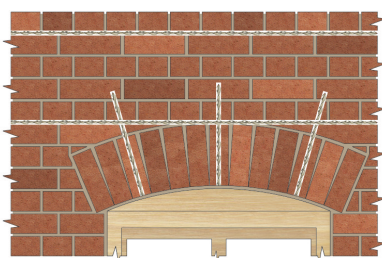

Repairing brick arch lintels

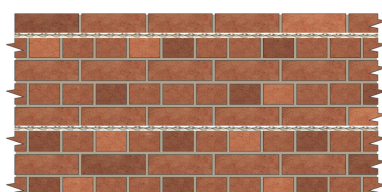

Creating masonry beams

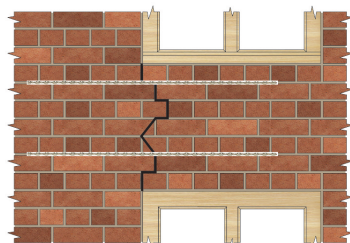

Crack stitching

Refer also to BPIR Helifix HeliBar and HeliBond Product Information Sheet.



FEATURES

- Non-shrink, non-gassing, thixotropic grout
- Flows easily under pressure to fill voids
- Rapidly develops compressive strength
- Cures to 45N/mm² (28 days at 20°C)
- Ready-to-mix components supplied in two-pack sets to reduce waste



For full product information, case studies and downloadable repair details go to:
www.helifix.co.nz/products/grouts-resins/helibond-grout

TECHNICAL SPECIFICATIONS

PERFORMANCE DATA

Compressive strength (at 20°C)	2 days – 15N/mm ² 7 days – 25N/mm ² 28 days – 45N/mm ²
Pot life	2 hours at 20°C
Temperature conditions	To be stored, away from direct sunlight, at 5°C to 25°C and not to be used at temperatures below 5°C or if there is a danger of frost
Pail storage	Pails to be stacked no more than four high
Shelf life	12 months under normal conditions
Pack size	4.5 litres (as standard)

RECOMMENDED TOOLING

For mixing components	Power drill and paddle mixer
For injection into slots	Helifix Pointing Gun Kit - CS
For injection into holes	Helifix Pointing Gun kit - HD
Also available with pneumatic power	

HELIBOND

Bar Diameter	Slot width	Hole diameter
6mm	8-12mm	10-12mm
8mm	12-14mm	14-18mm
10mm	14-16mm	16-18mm

NB To ensure a reliable bond, all mortar must be removed from the masonry unit surfaces, within cut slots, before wetting down

Health and safety

HeliBond contains Portland Cement and is therefore alkaline when wet. Unnecessary skin contact should be avoided. In case of eye contact, the eye must be irrigated with gently running clean, fresh water and medical attention sought.

A separate Health & Safety Data sheet is available on request.

DIRECTIONS FOR USE

NOTE

- If the pail is to be re-used ensure that it is completely clean before loading fresh material
- Pointing may be carried out as soon as the HeliBond has started to set
- After use, clean all tools, mixers and containers with clean, fresh water

For anchoring applications, a minimum clearance of 2mm all around the component will be adequate but should be increased to overcome drill wander in deeper holes, 500mm+, or to accommodate highly absorbent substrates. For Helifix bars and ties the following will generally apply.



1. Empty the contents of the liquid pack into the pail.



2. Add the contents of the powder pack.



3. Stir thoroughly using a power-driven paddle mixer. Do not attempt to mix by hand as this will result in inadequate mixing.



4. Check the piston is a snug fit in the cartridge and adjust in accordance with the pointing gun instructions. Load the mixture into the cartridge in the pointing gun immediately after agitating.



5. Inject into the slot or hole in a continuous operation. Typical working life of the mixture in the pail is around 2 hours with re-agitation. The cartridge should be emptied within 5 minutes. If the injection process is interrupted for any reason, empty any cartridge contents back into the bucket and re-mix until it again reaches a smooth injectable consistency.